


Fer Plat

QUALITY	
EN 10025	S235/S275/S355 JR-JO
ASTM	A36/A570/A615/A572/GR40/GR50/GR60
ROLLING TOLERANCE	
EN	10058
ASTM	A6
DIN	1017

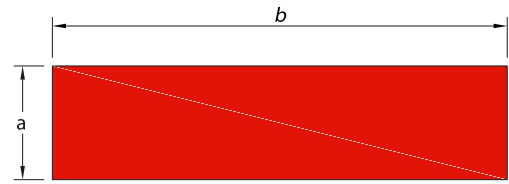

mm	3	4	6	8	10	12	14	16	18	20	22	24	25	30	35	40
10	0,236	0,314														
12	0,280	0,380	0,570													
14	0,329	0,440	0,660	0,879												
15	0,353	0,470	0,706	0,942												
16	0,377	0,502	0,754	1,000	1,260											
18	0,424	0,565	0,848	1,130												
20	0,471	0,628	0,942	1,260	1,570											
25	0,589	0,785	1,180	1,570	1,960											
30	0,706	0,942	1,410	1,880	2,360											
35	0,824	1,099	1,650	2,200	2,750											
40	0,942	1,256	1,880	2,510	3,140	3,770	4,396	5,024	5,652	6,280	6,908	7,536	7,850			
45		1,413	2,120	2,830	3,530	4,240	4,946	5,652	6,358	7,070	7,772	8,478	8,830			
50		1,570	2,360	3,140	3,930	4,710	5,495	6,280	7,065	7,850	8,635	9,420	9,810	11,800		
60			2,830	3,770	4,710	5,650	6,594	7,536	8,478	9,420	10,362	11,304	11,800	14,100	16,500	18,800
70			3,300	4,400	5,500	6,590	7,693	8,792	9,891	11,000	12,089	13,188	13,700	16,500	19,200	22,000
80			3,770	5,020	6,280	7,540	8,792	10,048	11,304	12,600	13,816	15,072	15,700	18,800	22,000	25,100
90			4,240	5,650	7,070	8,480	9,891	11,304	12,717	14,100	15,543	16,956	17,700	21,200	24,700	28,300
100			4,710	6,280	7,850	9,420	10,990	12,560	14,130	15,700	17,270	18,840	19,600	23,600	27,500	31,400
120				7,540	9,420	11,300	13,188	15,072	16,956	18,800	20,724	22,608	23,600	28,300	33,000	37,700
125				7,850	9,812	11,775	13,738	15,700	17,662	19,625	21,588	23,550	24,531	29,438	34,344	39,250
130					10,205	12,246	14,287	16,328	18,369	20,410	22,451	24,492	25,512	30,615	35,718	40,820
140					10,990	13,188	15,386	17,584	19,782	21,980	24,178	26,376	27,475	32,970	38,465	43,960
150					11,800	14,100	16,485	18,840	21,195	23,600	25,905	28,260	29,400	35,300	41,200	47,100
160					12,600	15,100	17,584	20,096	22,608	25,120	27,632	30,144	31,400	37,680	43,960	50,240
180					14,100	17,000	19,782	22,608	25,434	28,260	31,086	33,912	35,325	42,390	49,455	56,520
200					15,700	18,800	21,980	25,120	28,260	31,400	34,540	37,680	39,250	47,100	54,950	62,800

inch	0,1	1/8	3/16	1/4	5/16	3/8	1/2	5/8	3/4	7/8	1	1.12	1 1/4	1 1/2	1 3/4	2
1/2	0,25	0,32	0,47	0,63												
5/8	0,32	0,40	0,59	0,79	0,99											
3/4	0,38	0,47	0,71	0,95	1,19	1,42										
7/8	0,44	0,55	0,83	1,11	1,38	1,66										
1	0,51	0,63	0,95	1,27	1,58	1,90	2,53									
1 1/8		0,71	1,07	1,42	1,78	2,14	2,85	3,56	4,27							
1 1/4		0,79	1,19	1,58	1,98	2,37	3,17	3,96	4,75	5,54						
1 1/2		0,95	1,42	1,90	2,37	2,85	3,80	4,75	5,70	6,65	7,60					
1 3/4		1,11	1,66	2,22	2,77	3,32	4,43	5,54	6,65	7,76	8,86	9,97				
2		1,27	1,90	2,53	3,17	3,80	5,06	6,33	7,60	8,86	10,13	11,40	12,66			
2 1/4			2,14	2,85	3,56	4,27	5,70	7,12	8,55	9,97	11,40	12,82	14,24	17,09		
2 1/2			2,37	3,17	3,96	4,75	6,33	7,91	9,50	11,08	12,66	14,24	15,83	18,99	22,16	
3			2,85	3,80	4,75	5,70	7,60	9,50	11,40	13,29	15,19	17,09	18,99	22,79	26,59	30,39
3 1/2				4,43	5,54	6,65	8,86	11,08	13,29	15,51	17,73	19,94	22,16	26,59	31,02	35,45
4				5,06	6,33	7,60	10,13	12,66	15,19	17,73	20,26	22,79	25,32	30,39	35,45	40,52
4 1/2				5,70	7,12	8,55	11,40	14,24	17,09	19,94	22,79	25,64	28,49	34,19	39,88	45,58
5				6,33	7,91	9,50	12,66	15,83	18,99	22,16	25,32	28,49	31,65	37,98	44,31	50,65
6				7,60	9,50	11,40	15,19	18,99	22,79	26,59	30,39	34,19	37,98	45,58	53,18	60,77
7					13,29	17,73	22,16	26,59	31,02	35,45	39,88	44,31	53,18	62,04	70,90	
8					15,19	20,26	25,32	30,39	35,45	40,52	45,58	50,65	60,77	70,90	81,03	